

Programming box

HPB/HPB-D

All operations can be performed from this device including manual robot operation, programming entry and editing, teaching and setting parameters. The display works interactively with the operator so even an absolute beginner can easily learn how to use programming box.


▼Applicable controllers

LCC140 **P.620**ERCD **P.646**SR1-X **P.652**
SR1-P

■ HPB / HPB-D basic specifications

Name		HPB	HPB-D
External view			
Model	Using with ERCD, SR1-X, SR1-P	KBB-M5110-01 (without a conversion adaptor)	KBB-M5110-21 (without a conversion adaptor)
Display		LCD (20characters × 4 lines)	
Emergency stop button		Normally closed contact point (with lock function)	
Enable switch		—	3-position
CE marking		Not supported	Applicable
Memory back-up device		SD Memory card	
Operating temperature		0°C to 40°C	
Operating humidity		35% to 85%RH (non-condensing)	
Dimensions		W107 × H230 × D53mm (Strap holder, emergency stop button not included.)	
Weight		650g	
Cable length		3.5m	

■ Part names and function

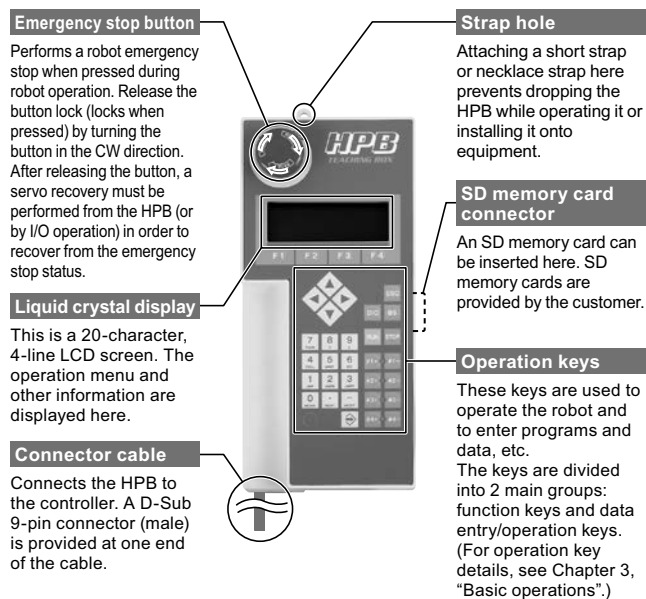

■ HPB-D rear side

